

VD 12 M CR



Luminaire: Followspot, discharge, 1200W zoom 07°-18°, cold restrike, G22

Type

Conventional line

Family

Followspot

Source

Discharge

Power

1200W

Connectors

Cable without plug

Lamp holder

G22

Voltage

220-240V, 50-60Hz

Product sizes

17.3Kg

Pack sizes

335mm x 1205mm x 355mm

23.2Kg

0.143m³

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Independent and removable shutter blades for beam shaping
- Filter frame lockable top cover
- Gobo-holder slot
- Soft and smooth lens focusing adjustment
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Auto power-off by safety microswitch for maintenance and access into the lantern
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector

Sizes (in mm)

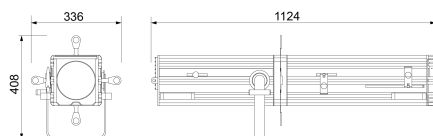

Light output diagram



Accessories

BS	Acc: Low stand, DIN, lazy leg
CGP2	Acc: 3-section Wind-Up Stand, lazy leg
CMA 12 E	Acc: Manual 6-colour colour changer
DIM 12 PERS/MAN	Acc: Manual mechanical dimmer
DIN P 10	Acc: TV spigot / M10 adapter with plate
MSR 1200 HR	Lamp: discharge 1200W / 5600K G38
PGB R 130	Acc: B size adjustable gobo-holder
RF	Acc: Wheel set with brake
SA 1200	Lamp: discharge 1200W / 5600K GY22
SUP BA 12/25	Acc: Ballast-holder for stand

LED equivalents

VD LED 250 WW DMX	Luminaire: Followspot, LED, 250W, WW
VD LED 250 RGBW DMX	Luminaire: Followspot, LED, 250W, RGBW
VD LED 250 CW DMX	Luminaire: Followspot, LED, 250W, CW